

6-FM-38Ah

Valve-regulated Lead Acid Battery Specification


Features

- Maintenance free
- Safety and no leakage
- Excellent recharge and discharge performance
- Low self-discharge rate
- Adapt to high or low temperature
- Good deep discharge performance
- Longer cycle life



Specification

Rated Voltage	12V
Numbers of cells	6 Cells
Capacity	38Ah@10hr-rate to 1.80V per cell @25°C
Weight	11.8kg
Internal Resistance	Approx. 9.6 mΩ
Terminal	F6
Max. Discharge Current	570A(5s)
Short Circuit Current	1900A
Max. Charging Current	9.5A
Reference Capacity	C10 38.0AH C3 29.1AH C1 21.0AH
Design Life	10~15 years
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -20mV/°C/Cell
Cycle Use Voltage	14.4 V~14.9 V @ 25°C Temperature Compensation: -30mV/°C/Cell
Operating Temperature Range	Discharge: -15°C~50°C Charge: 0°C~40°C Storage: -15°C~40°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	Less than 3% at 25°C per month
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

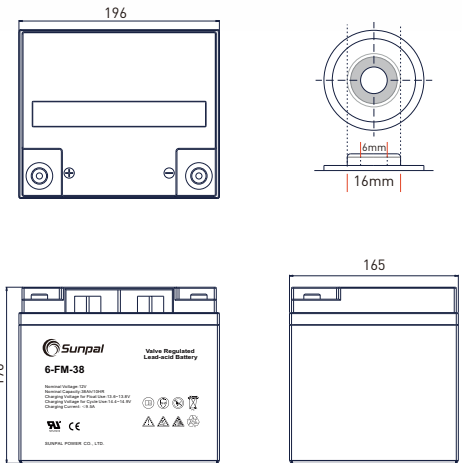

Length	196±2mm (7.7 inches)
Width	165±1mm (6.5 inches)
Height	170±1mm (6.7 inches)
Total Height	170±1mm (6.7 inches)

Constant Current Discharge Characteristics: A(25°C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	3h	5h	10h	20h
1.80V/cell	87.31	65.36	52.54	43.04	34.11	25.46	20.05	9.69	6.38	3.80	1.98
1.75V/cell	98.42	71.82	57.38	46.27	35.44	26.41	21.00	9.88	6.54	3.84	2.00
1.70V/cell	108.40	78.28	61.28	48.64	36.86	27.46	21.66	10.17	6.71	3.88	2.03
1.65V/cell	119.51	84.46	65.17	51.68	38.86	28.12	22.42	10.64	6.90	3.95	2.06
1.60V/cell	131.86	91.68	69.64	55.01	41.04	29.36	23.18	10.93	7.13	4.00	2.07


Constant Power Discharge Characteristics: WPC(25°C)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	3h	5h	10h	20h
1.80V/cell	157.89	119.23	96.71	79.90	64.03	48.55	38.48	18.81	12.45	7.51	3.90
1.75V/cell	174.23	128.92	104.31	85.12	65.93	49.88	40.09	19.10	12.73	7.57	3.94
1.70V/cell	186.58	137.37	109.82	88.73	68.21	51.68	41.23	19.57	13.02	7.65	4.02
1.65V/cell	202.83	146.87	115.90	93.58	71.35	52.54	42.28	20.33	13.30	7.79	4.07
1.60V/cell	218.50	155.80	121.89	98.61	74.86	54.44	43.61	20.90	13.78	7.86	4.08


6-FM-38Ah

Valve-regulated Lead Acid Battery Specification


Charge Characteristics for Float Use @ 25°C/77°F

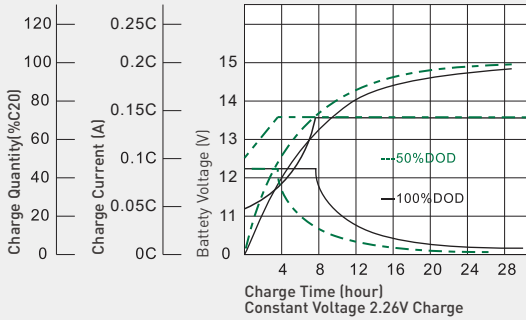


Discharge Characteristics at Various Rates @ 25°C/77°F

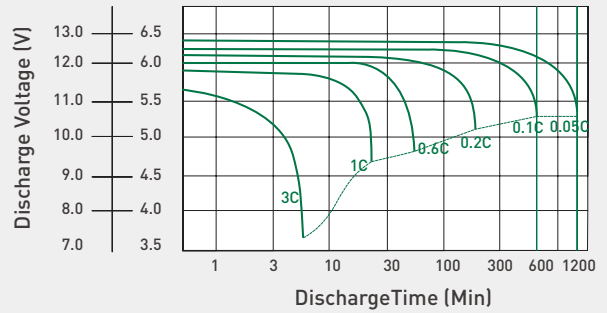


Cycle Life in Relation to Depth of Discharge

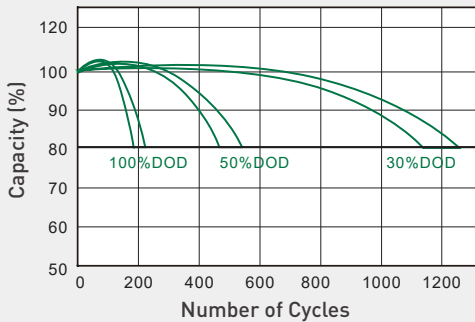


Float Service Life

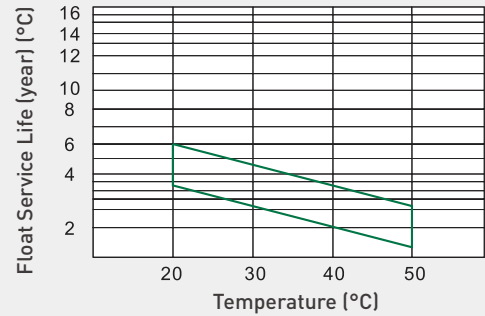


Temperature and Valid Capacity

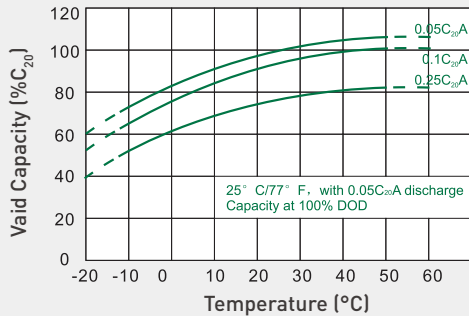

Self Discharge Characteristics

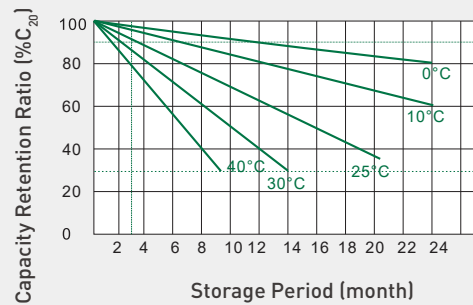

Capacity and Open Circuit Voltage

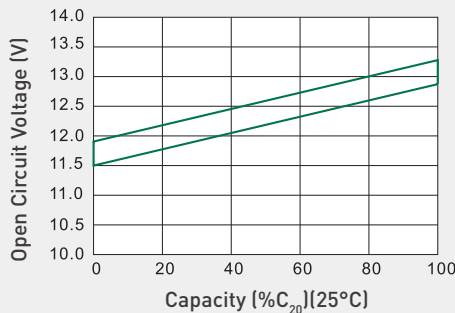

Relationship between Charging Voltage and Temperature

